


# Underbridge Inspection Unit

## MBI 140-2,0/S

### Self-propelled working unit

Max. horiz. outreach below construction	14,00 m	Total length	12,00 m
Width of platform (basic/telescopic)	2,00 m	Total width	2,55 m
Max. lowering depth	8,50 m	Transport height	4,00 m
Max. vertical overbridging	2,40 m	<p>Diesel power unit, rear view camera Permissible up to max. wind speed of 12,5 m/s.</p> <p>Driving licence category: C</p> <p><b>Equipment on platform</b></p> <p>Power connection 220-380 V, 2 scaffolds, videocontrolled platform</p>	
Max. horizontal overbridging (noise barrier)	3,00 m		
Max. load on platform (incl. equipment)	600 kg		
Max. capacity on extended telescopic platform	400 kg		
Rotation area of platform	180 °		
Permissible longitudinal gradient	6 % (3,5°)		
Space required on bridge	2,50 m		
Total weight	28.000 kg		

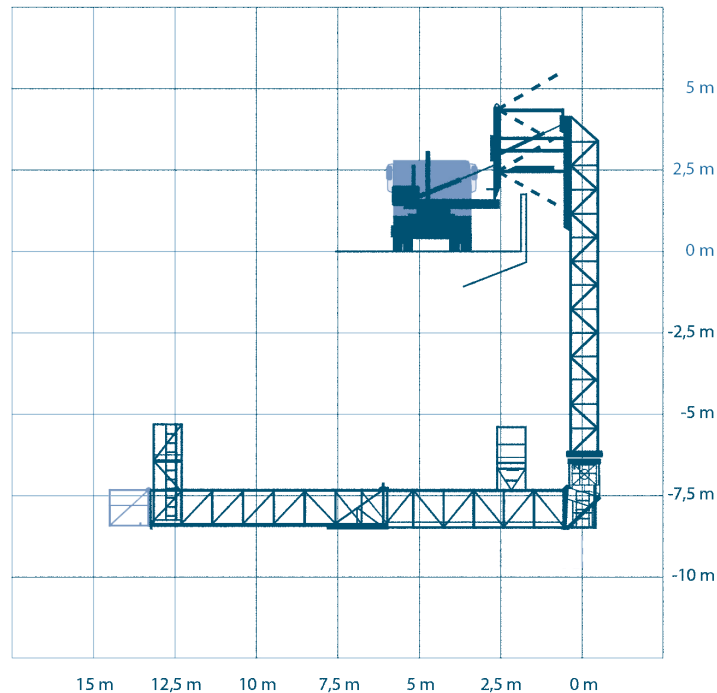

WEICO Srl./GmbH - Zona produttiva Ziggler 4 - I - 39040 Gewerbezone Ziggler - I - 39040 Velturmo/Feldthurns (BZ) - Partita IVA/MwSt. Nr./VAT Number: IT02478870211 - +39 0472 857 800 - info@weico-bridge.it - www.weico-bridge.it