


# Underbridge Inspection Unit

## MBI 160-180 - 1,7/S

### Self-propelled working unit

Max. horiz. outreach below construction	16,00 - 18,00 m	Total length	12,00 m
Width of platform (basic/telescopic)	1,70/1,60 m	Total width	2,50 m
Max. lowering depth	9,30 m	Transport height	4,00 m
Max. horizontal overbridging	2,50 m	Diesel power unit, rear view camera Permissible up to max. wind speed of 12,5 m/s. Driving licence category: C <b>Equipment on platform</b> Power connection 220 - 380 V, 2 scaffolds, videocontrolled platform	
Max. vertical overbridging (noise barrier)	2,80 m		
Max. load on platform (incl. equipment)	800 kg		
Max. capacity on extended telescopic platform	400 kg		
Rotation area of platform	180 °		
Permissible longitudinal gradient	6 % (3°)		
Space required on bridge	2,85 m		
Total weight	26.000 kg		

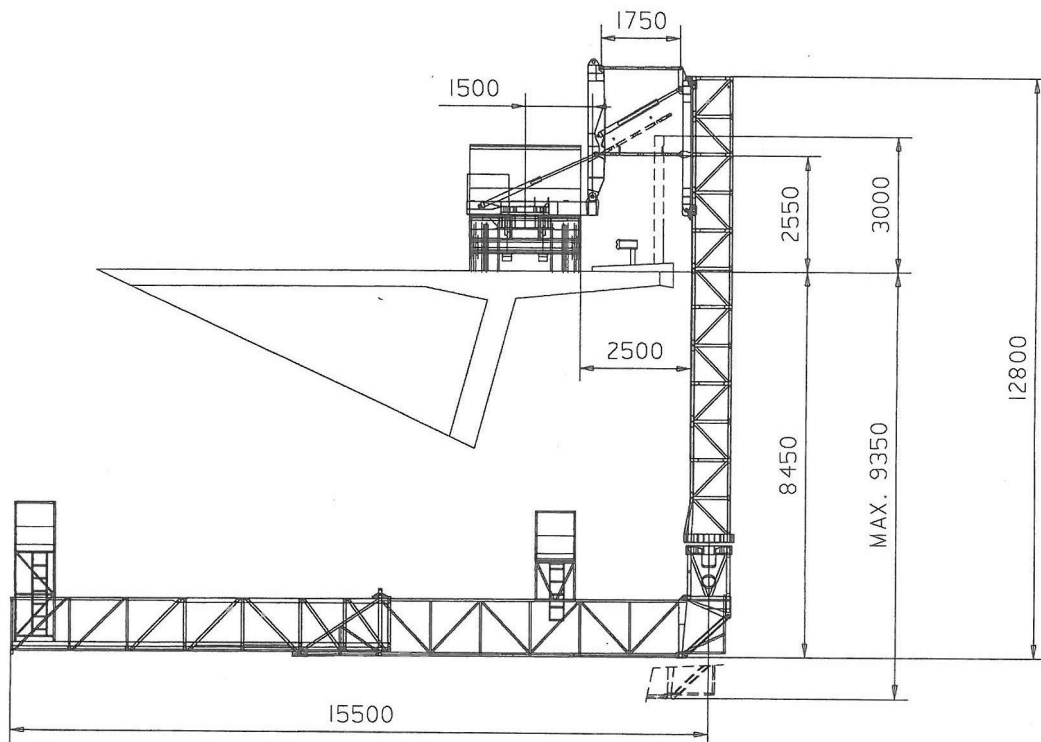

WEICO Srl/GmbH - Zona produttiva Ziggler 4 - Gewerbezone Ziggler - I-39040 Velturmo/Feldthurns (BZ)

Partita IVA/MwSt. Nr./VAT Number: IT02478870211 - +39 0472 857 800 - info@weico-bridge.it - www.weico-bridge.it